



STAFF REPORT

DATE: June 26, 2012

TO: Mayor and City Council

FROM: Jason Riding, Streets Superintendent

SUBJECT: **1700 EAST & 1900 EAST ROADWAY RECONSTRUCTION PROJECT**

RECOMMENDED ACTION

Motion to:

- Award the 1700 East & 1900 East Roadway Reconstruction project to the lowest responsible bidder, Johnston & Phillips, Inc., in the amount of \$194,651.30 and authorize the Director of Public Works to issue a Notice to Proceed for the project, and
- Authorize the Director of Public Works to issue Change Orders or adjustments to quantities of the unit price items, as needed, not to exceed the budget amount of \$201,948.00.

SUMMARY OF ISSUES/FOCUS OF ACTION

Both 1700 East and 1900 East streets have been in need of maintenance and rehabilitation for some time. As part of the City's pavement maintenance inventory and maintenance program, it was determined that these streets were high on the priority list and were therefore budgeted to be reconstructed.

Both streets will be completely rebuilt. The finished roadway will consist of three inches (3-inches) of asphalt on eight inches (8-inches) on twelve inches (12-inches) of imported subbase material. The project work also includes associated underground utility replacement and concrete replacement work (including curb and gutter, drive approaches, sidewalk, and ADA ramps).

As this project is a reconstruction of roadways in residential areas of town, there will be some interruption to the residents along these streets. All measures possible will be taken to minimize the impacts to the residents. The contractor is to backfill his trenches each night to allow for residents to get in and out of their driveways during the construction period.

CITY COUNCIL MEETING

July 3, 2012

SCOPE OF WORK

Full-width roadway reconstruction (lip-of-gutter to lip-of-gutter) of 1700 East between 250 South and 400 South, and 1900 East between 850 South and Canyon Road; roadways to be reconstructed to a structural section of 3-inches AC pavement, on 8-inches of untreated road base on 12-inches of imported sub-base. Project also includes all associated grade adjustment of existing manholes and water valves within reconstructed area; installation of storm drain piping, associated structures and ancillary concrete work

Exhibit “A” shows the extent of roadway improvements for the project.

BID RESULTS

City Public Works Department Engineering Division personnel prepared plans, specifications, and bidding documents (i.e. Contract Documents) for the project. These Contract Documents were placed on BidSync, an internet bidding service approved by the State of Utah. Bids were received via BidSync and tabulated and City Personnel. The following were the bids received:


Company	Bid Amount	Comments
Johnston & Phillips, Inc.	\$194,651.30	Responsible Low Bid
Sunroc Corporation	\$249,775.15	
Vancon, Inc.	\$267,512.55	

FISCAL IMPACT

This project is budgeted for the current (2012-2013) fiscal year. The GL Account and budgeted amount are shown below:

GL Account	Description	Budgeted Amount
45-4410-881	C Roads, Road Reconstruction	\$201,948.00

EXHIBIT "A" 1700 EAST & 1900 EAST ROADWAY RECONSTRUCTION

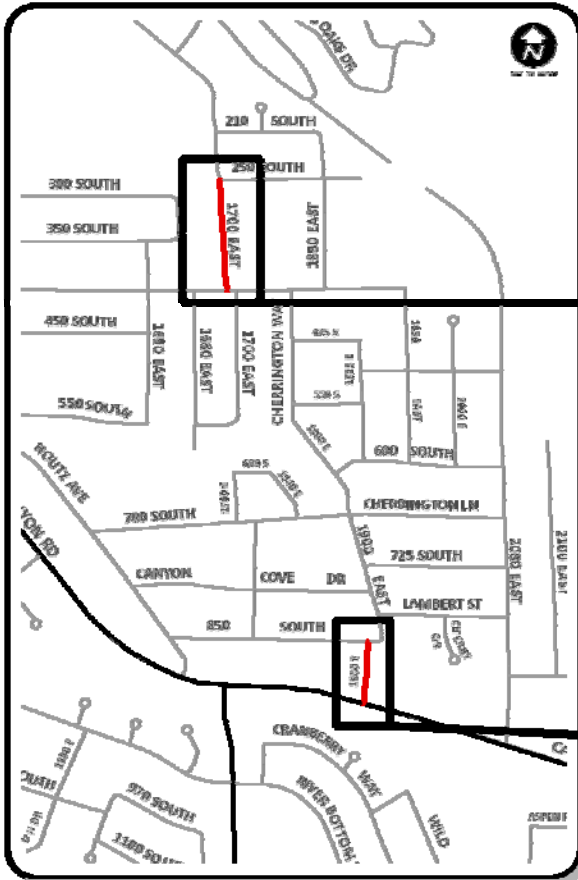

Public Works Department
110 South Main Street
Springville, UT 84663
Tel: (801) 491-2780
Fax: (801) 489-2709