



59' STREET CROSS-SECTION (RESIDENTIAL LOCAL)

LOOKING NORTH OR WEST

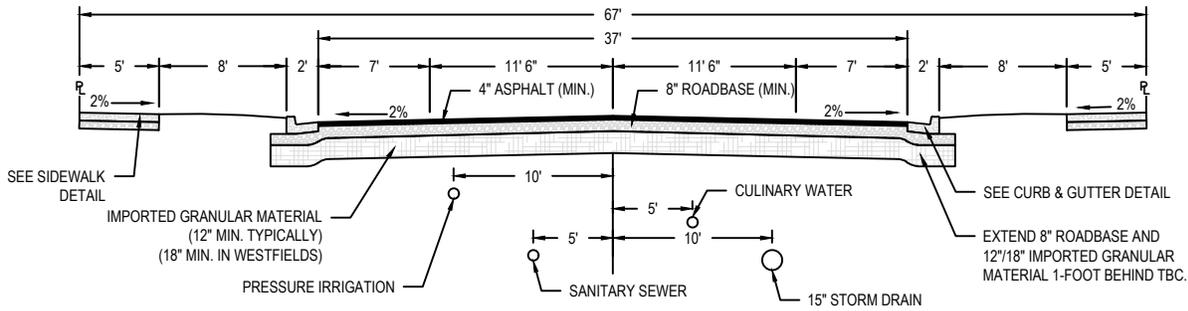


67' STREET CROSS-SECTION (COMMERCIAL LOCAL)

LOOKING NORTH OR WEST

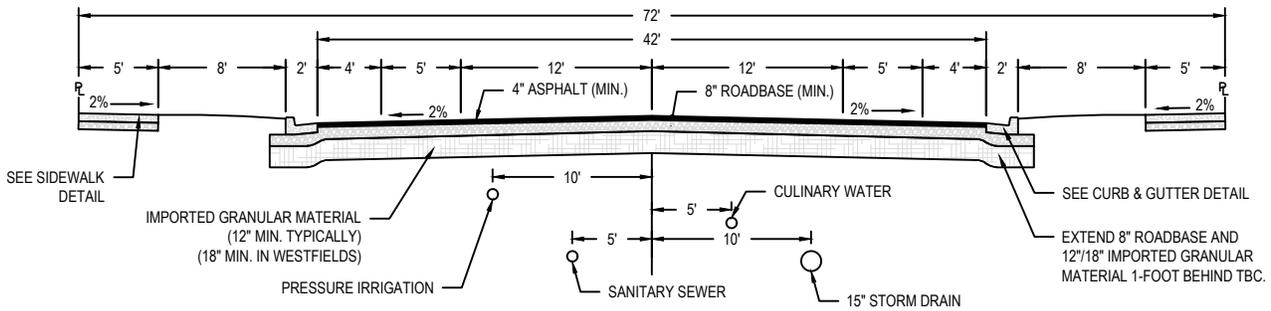

72' STREET CROSS-SECTION (MINOR COLLECTOR)

TWO LANE LOOKING NORTH OR WEST

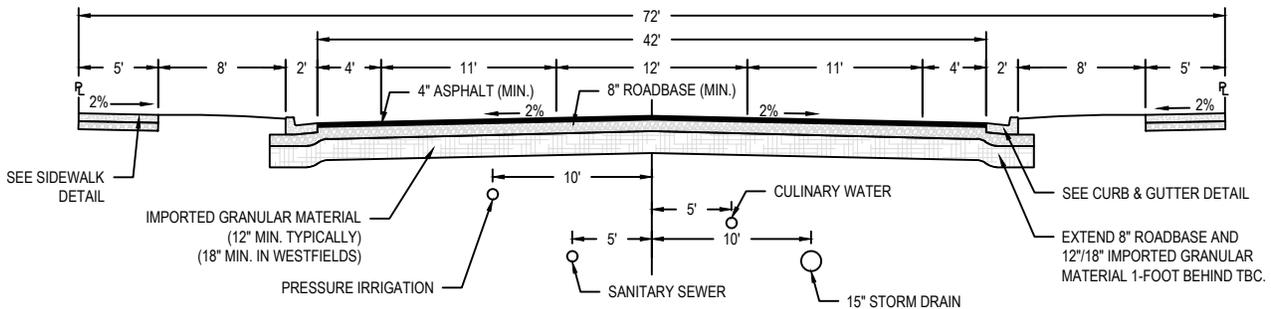

72' STREET CROSS-SECTION (MINOR COLLECTOR)

THREE LANE LOOKING NORTH OR WEST

NOTES:

1. IMPORTED GRANULAR MATERIAL, ROADBASE AND WHERE NECESSARY ASPHALT THICKNESS WILL MEET THE CITY MIN. AS SHOWN ABOVE OR THE RECOMMENDED THICKNESS FROM THE GEOTECHNICAL REPORT, WHICHEVER IS GREATER.
2. TELECOMMUNICATIONS CONDUIT SHALL BE LAID WHERE TELEPHONE CONDUIT IS LAID.
3. 30" OF COVER IS REQUIRED FOR ALL UTILITIES UNDER THE ASPHALT SECTION OF A PUBLIC ROADWAY. THE REQUIRED COVER OVER UTILITY LINES ARE AS FOLLOWS:
 CULINARY WATER = 48" MINIMUM
 PRESSURE IRRIGATION = 30" MINIMUM
 SANITARY SEWER = PER DESIGN
 STORM DRAIN = 30" MINIMUM
 TELECOMMUNICATIONS = 30" MINIMUM
 ALL OTHERS = PER UTILITY REQUIREMENTS



SPRINGVILLE CITY
 110 SOUTH MAIN STREET
 SPRINGVILLE, UTAH 84663
 ENGINEERING OFFICE
 (801)491-2780

**MAJOR STREET CROSS SECTION
 AND UTILITY LOCATION**

DRAWING #

RD-02

ADOPTED DATE

APRIL 2018